

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/254864608>

H2E2: A Hybrid, Hexagonal & Energy Efficient WSN Green Platform for Precision Agriculture

Conference Paper · December 2012

DOI: 10.1109/HIS.2012.6421326

CITATIONS

11

READS

177

4 authors, including:



Milind S Pande

Dr.Vishawnath Karad MIT World Peace University

53 PUBLICATIONS 36 CITATIONS

[SEE PROFILE](#)



Nitin Krishnarao Choudhari

Priyadarshini Bhagwati College of Engineering, Nagpur

23 PUBLICATIONS 77 CITATIONS

[SEE PROFILE](#)



Debajyoti Mukhopadhyay

Bennett University

238 PUBLICATIONS 1,336 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



An Internet of Things (IOT) based Monitoring System for Efficient Milk Distribution [View project](#)



Cellular Automata usage in Designing Search Engine [View project](#)

H2E2: A Hybrid, Hexagonal & Energy Efficient WSN Green Platform for Precision Agriculture

Milind Pande MITSOT Pune, India milindpande@mitsot.com	N. K. Choudhari BCCE Nagpur, India drnitinchoudhari@gmail.com	Shantanu Pathak MITSOT Pune, India shantanu@mitsot.com	Debajyoti Mukhopadhyay Maharashtra Institute of Technology Pune, India debajyoti.mukhopadhyay@gmail.com
---	--	---	--

Abstract—To enhance productivity of farms there is need to follow mantra by Food and Agricultural Organization of the United Nations (FAO) i.e. “Save & Grow”. Save and Grow directs towards Precision Agriculture (PA) for sustainable crop production intensification. There is challenge to establish information communication technology (ICT) technologies in fields and remote areas. Proposed system is novel platform to establish wireless sensor network (WSN) to execute PA overcoming the challenge to set up wireless sensor and energy efficient network at farms. Hybrid network of free space optics (FSO) and radio frequency (RF) connectivity and use of solar at farms and base station / control station makes it energy efficient. License free, high bandwidth FSO technology enables multimedia data exchange thus opening gate for many applications. Hybrid Hexagonal Positioning (HHP) for sensor nodes has achieved better link utilization compared to other topologies saving energy and increasing lifetime of sensor node and network. Overall energy efficient, centralized, environment friendly system allows cost effective solution to farmers. A village centric model is presented to define applicability of proposed solution.

Keywords- wireless sensor network ;free space optics; hybrid hexagonal positioning; radio frequency;precision agriculture

I. INTRODUCTION

Food and Agricultural Organizations of the United Nations (FAO) recently gave the mantra ‘Save and Grow’ which directs to achieve sustainable crop production intensification. Precision Agriculture (PA) is best technique to achieve it. ICT plays crucial role in PA and this will enhance productivity, conserve resources, reduce negative impacts on environment and improve socio economic condition of farmers [1]. WSN catalyze the agricultural productivity with the help of sensors. Sensors record the data on field and reports to control station with the help of connecting network. Electricity or energy is the major barrier for sensor and network lifetime. Energy consumption is the major consideration in designing WSN due to limited and irreplaceable power source for an individual sensor node [2]. Node’s power source dictates the lifetime of network. Currently most of the WSN use RF channel for connectivity which consumes the maximum energy of the individual node [3].

Challenge is to overcome the energy demands at sensor node and communication transmission. Unavailability of electricity at base station, control station may lead to failure of system thus WSN and PA practices in developing countries. To overcome the challenges and taking advantage of open space and ample light at farm fields this study proposes use of FSO-RF hybrid connectivity with novel sensor nodes positioning system and solar energy harvesting supported by technology from [4] for control station and base station. FSO uses reflectors to avoid retransmission energy requirement [5]. Printable solar cells can be used for RF nodes mentioned in the system from [6] which are DSSC modules with highest power density energy conservation. Further to cover maximum area with minimum sensors and energy novel positioning system called Hybrid Hexagonal Positioning (HHP) is proposed. Following village centric model is presented to show applicability of proposed system.

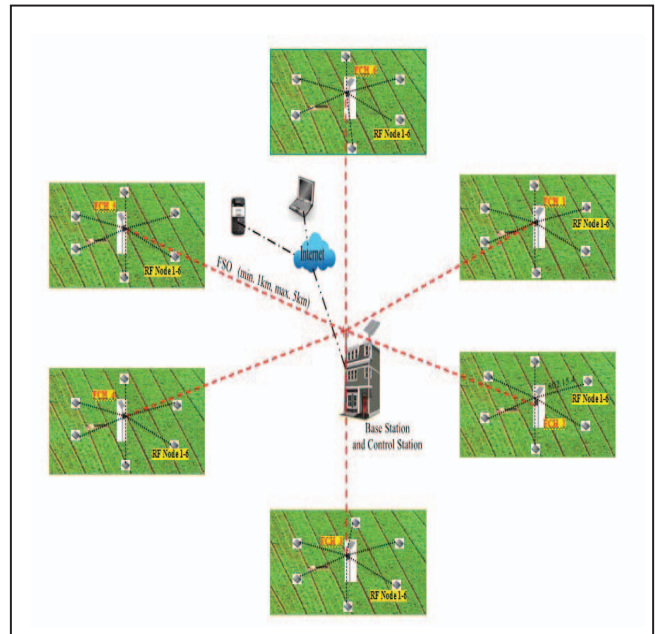


Figure 1. HHP Architecture Model for a village

HHP Architecture shown in figure uses hexagonal shape similar to cellular cell with the logic of covering maximum area. FCH1 to FCH6 (FSO cluster heads) are cluster heads with FSO links and retro-reflectometers to reflect the laser beam back to receiver at direction of incidence, RF1 to RF6 nodes in each of six farms are connected with 802.15.4 ZigBee connectivity to the related cluster head. RF nodes are supported can be given solar cell support for energy [6]. FCHs can be given solar support as per [4]. At centre base station/control station for a village is shown. All the data is sent to base station from sensor nodes as per defined flow. Base station is connected with FSO link with line of sight (LoS) on FCH in field. Base stations are also solar powered as major source. Control Station for a village maintains network and provide services of sensor deployment, network connectivity and user end services for software application, mobile application, revenue generation etc. which will enable centralized farm monitoring, data analysis, regulations, and precision agriculture practices to implement. With the help of internet connectivity users can manage their farms from internet. RF communication is kept for shorter distance communication and FSO for longer distance communication.

Section 2 describes FSO-RF Hybrid link and benefits, section 3 is Hybrid Hexagonal Positioning (HHP) for agricultural fields, section 4 presents simulation and results of proposed system , section 5 describes energy management followed and section 6 concludes the paper with application, delivery model, challenges and future scope of project.

II. FSO-RF HYBRID LINK AND BENIFITS

A. Free Space Optics for H2E2

Free space optics has outstanding advantages compared to point-to-point radio systems in terms of higher bandwidth, license free spectrum, better security and no electromagnetic pollution [7]. It has challenges of rain, snow, fog and direct sun beam. These challenges are not permanent in at least in India thus data acquisition per day or some hours is not the issue. Base station is connected by FSO link to cluster heads. Beam is targeted from elevated base station. The power requirements will be fulfilled by solar as major source. The laser beam is reflected back by node to base station after modulation at sensor node in field. Each node on field is equipped with modulating retroreflectometer (MRR) [8]. The MRR has an optical retroreflectometer- a passive device which reflects the beam incident on it back to the direction of incidence targeted to receiver [9]. MRR uses On Off Keying (OOK) which is again energy efficient modulation technique. For the modulation device C being capacitance and V being voltage, energy required for switching voltage. Energy required for modulation is related to CV^2 . Atmospheric Turbulence becomes issue for FSO link with laser beam for than 1km range. For villages this is sufficient range with availability of LoS. Equipment with following status are available in market which suits to requirement mentioned in table 1.

TABLE I. FSO OUTDOOR EQUIPMENT PERFORMANCE

Bit Rate	Rain Level (Coverage)		
	Light Rain	Heavy Rain	Monsoon
1.25 Gbps	2km	1.1km	600m
1.5 to 54 Mbps	5.2km	2.3km	1km
Attenuation/ Loss	-3db	-10db	-30db

B. Radio Frequency Link for H2E2

RF nodes RF 1 to 6 are connected by 802.15.4 ISM 2.4GHz band which is again license free and suits to the coverage requirement of 500 to 800 meters for the proposed model. These nodes are arranged in specific hexagonal positions to cover maximum area in minimum sensors. Optimized distance between sensor nodes and fixed positions i.e. known positions helps to save energy and thus increase lifetime of sensor nodes.

For RF link the signal power at the receiver $P_r(d)$ is a function of the transmitter and receiver separation distance, d , and given as

$$P_r(d) = P_t / P_L(d) \quad (1)$$

Where P_L is power loss and P_t is transmitted power. The free space reference distance d_0 , is determined from measurements close to the receiver [10]. Assuming average path losses the path loss can be written as [10]:

$$P_L(d) = P_L(d_0) \cdot \left(\frac{d}{d_0}\right)^n \quad (2)$$

The path loss exponent, n , depends upon propagation environment. Free Space Propagation Path Loss, P_{LF} is given as [9]:

$$P_{LF}(d) = \frac{(4\pi)^2 d^2 L}{GtGr \lambda^2} \quad (3)$$

where Gt is transmitter antenna gain, Gr , is the receiver antenna gain, λ is the wavelength and L is the system loss factor. The value $P_L(d_0)$ in equation 2 can be determined using equation 3. For microcontroller systems, a suitable value of d_0 is 1m [10]. Assuming L, G_t and G_r are 1, Equation 2 can be written as

$$P_L(d) = \left(\frac{4\pi}{\lambda}\right)^2 \cdot d^n, d > d_0 \quad (4)$$

Most of the energy dissipated by sensor node is due to RF transmission and reception [11]. Here RF transmission and reception is made for small distance. Further they are connected with FSO link from cluster heads. Even positions of sensors are almost fix which do not consume more energy in routing. Sensor nodes used in agriculture are well tabulated in [12]. For reference (1500 m x 1500 m) ZigBee network which suits best and covers 500-800 meters.

TABLE II. ZIGBEE FOR PROPOSED MODEL

ZigBee	Specifications	
	Frequency Band	2.4Ghz
	Range	30m-1.6km
	Data Rate	250Kbps
	Power Consumption and Cost	-3dBm or 0.5mW
	Modulation/Protocol	DSSS,CSMA/CA
	Security	128 bit

C. Introduction to OFC-FSO System

Proposed system can also take the advantage of Optical Fiber Network if provided as backbone network. As OFC network is speedily spreading across country use of it for the proposed system can be considered in future. OFC-FSO model are tried and are used as redundant model in optical network breakdown. [13] has achieved more than 1 Gbps for 120 meters of FSO link.

III. HYBRID HEXAGONAL POSITIONING (HHP) FOR AGRICULTURAL FIELDS

Random deployment of wireless sensors in network environment and need for determining sensor location has made the location problem as critical challenge. Importance of organized sensors and use of FSO/RF is tabulated from study of [9][14].

TABLE III. VALUE OF ORGANIZED SENSOR POSITIONING

Sensor Positioning	Effects on Network	
	Random	Organized
Traffic Distribution	Non uniform and leads to blocking and extra energy utilization	Uniform and hence optimized energy utilization
Lifetime	RF only has less lifetime	RF/FSO has 2-3 times higher lifetime
Area Covered	Non uniform area is covered so it's waste of resources	Uniform area is covered and exact information is obtained

Figure 2 presents the grid model for sensor positioning in agricultural fields. Sensor positions are marked in hexagon edges and for the present model cluster heads FCH 1 to 6 are linked with FSO to solar powered base station of figure1. Putting up the geographic two dimensional position of sensors generalized scale up model for multiple and different size of farms can be achieved. Conditions of atmospheric turbulence need to apply depending upon region of implementation. As per figure 2 Position (P) for FSO nodes from 'a' to 'h' expressed as PNode = { (X1, Y2), (X3, Y1/2), (X5, Y1/2), (X7, Y1/2), (X9, Y2), (X7, 3Y3/2), (X5, 3Y3/2), (X3, 3Y3/2)}

The base station position PBS = (X5, Y2) Now using trigonometric properties and basic geometry positions of sensor nodes are known. So there will be no

need of GPS for position tracking thus part of this energy will not be consumed at sensor nodes. Also distance between each node can be known which also allow planning the link budget for RF nodes.

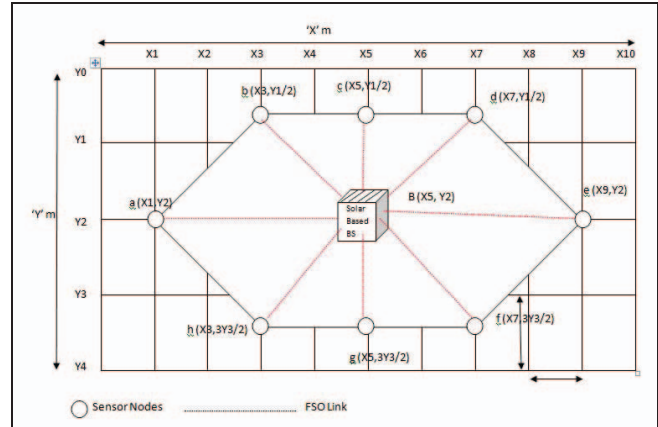


Figure 2. Hexagonal Positioning Grid Model

A. Architecture Framework for Hexagonal Hybrid Positioning

To set the grid model to proposed village centric system in figure 1 double hexagonal or double hexagonal shield is prepared. First covers for FSO link connecting cluster heads at farm. Second covers individual RF connectivity at each cluster in fields. Thus overall model is replicated with basic grid model.

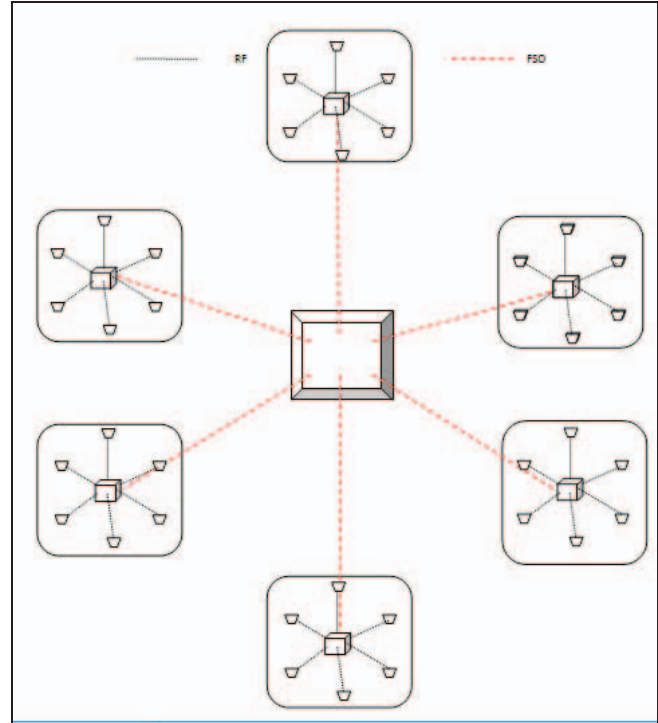


Figure 3. Scale up model to fit in complete farmwork

IV. SIMULATION AND RESULTS

Simulations for the proposed system are performed at different levels. First the hexagonal framework is compared with other topologies in wireless network. Separate FSO model is simulated for the range of 500 meters from optical simulator. Hybrid network model as per proposed system is simulated and results are obtained which makes the system reliable. Separate simulations are run with some common parameters set as combining optical and RF simulation is difficult job. Authors will try to cover the combined simulation and results with proper simulator meeting the requirements in future study.

A. Topology Comparison

Simulations are performed on ‘QualNet’ comparing Grid, Tree and Proposed topology. Wireless test bed is set. Routing protocol is Bellmen Ford for all. Link bandwidth is 10Mbps with heard size of 224 Bytes. Further figures are shown “in press” [15].

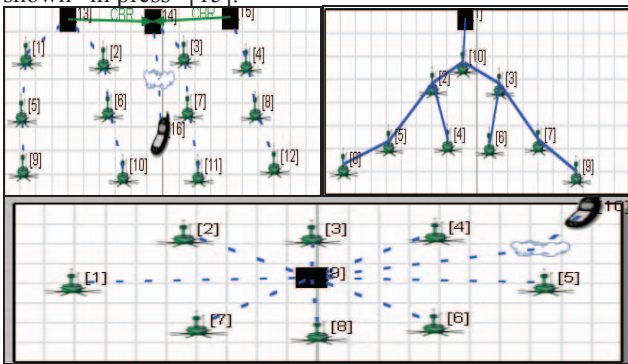


Figure 4. Grid, Tree and Proposed Architecture

The results obtained shows clearly that organized sensor positioning gives better performance results. Link Utilization by proposed structure is uniform than Grid and Tree structures. Thus as per the study by[9][14]energy utilization and lifetime proposed architecture will be higher.

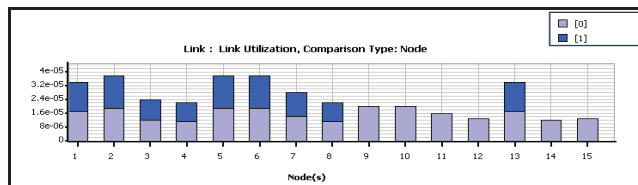


Figure 5. Link Utilization by Grid topology

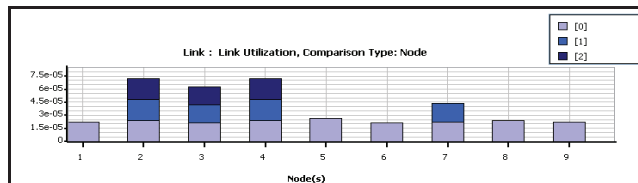


Figure 6. Link Utilization by Tree topology

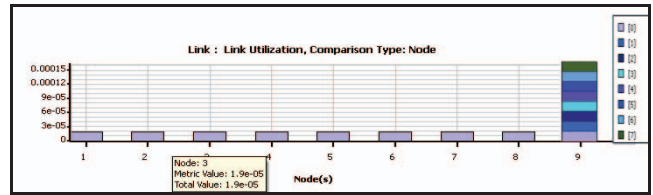


Figure 7. Link utilization for proposed structure

Following Observation were made from the results:

TABLE IV. OBSERVATION FOR TOPOLOGY COMPARISON

Parameter	Topology		
	Grid	Tree	P
Link Utilization/Traffic Distribution	Non uniform leading to high energy utilization and low lifetime	Non uniform leading to high energy utilization and low lifetime	Uniform and as per studied will utilize low energy and will have 2-3 times more lifetime
Packet Queue	More queue on node in field	More queue on node in field	Que only at substation or base station
Frame Loss	No frame loss	Observed	No Frame Loss

B. FSO Link as Reflected Beam

As mentioned earlier FSO link is targeted by laser beam and the same beam is retroreflected by a passive optical device. No such passive optical device is available to show reflected beam in simulator. This study opens the opportunity for simulators to build a patch for retroreflector. FSO communication link is built using optical simulator. It is shown in figure 8.

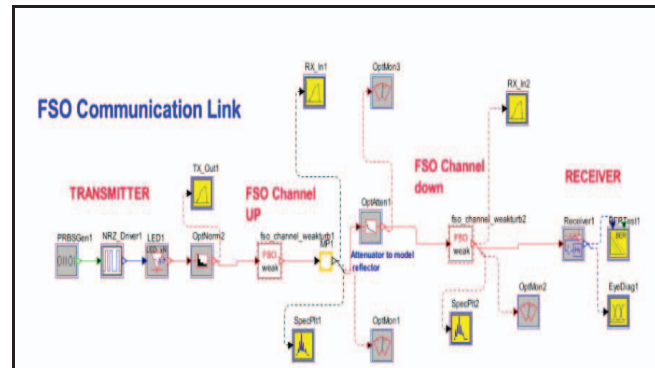


Figure 8. FSO Reflected Link Model

This figure demonstrates a simple FSO link design. Transmitter consists of NRZ-modulated LED a bit rate1.25Gbps, wavelength 1550nm and power 1.3dBm. Receiver is PIN/TIA with an aperture area 180 sq.cm. The link range is 500meters.The beam divergence angle is 3mrad. Additional environmental attenuation of FSO channel in weak turbulence approximation is represented as Gaussian

distributed variable with mean value -4.98dB and standard deviation 1.9dB.

The reflected beam is achieved after transmission and after FSO channel model an attenuator is connected to model reflected light which can be passed through another FSO channel (reflected light towards origin). Link Parameters set for the simulation are mentioned in table V.

TABLE V. FSO LINK PARAMETERS FOR SIMULATION

FSO	Link Parameters	
	Wavelength	1.55E-6
Bitrate	1.25E9	
TX_Power	20	
Distance	500m	
Divergence_rad	0.003	
Atten_add	-4.92 dB	
Sigma_add	1.9dB	

Thus the expected results are obtained with the simulation. BER at the receiver is at acceptance level. BER obtained at the receiver is acceptable looking at the application targeted and comparing the RF network for the same conditions a of FSO.

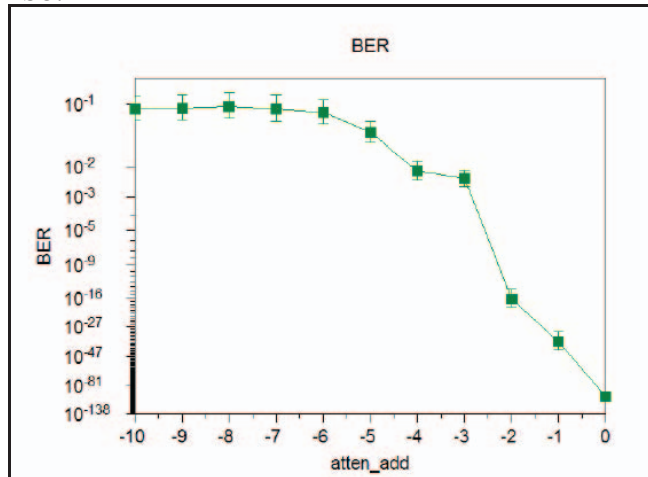


Figure 9. BER at receiver after beam travels twice in FSO channel

C. Complete System Model Simulation

Complete system model represents H2E2 platform. The complete system is placed or covers 4000mx6000m area. Qualnet is used for complete simulation. RF sub nodes are given bandwidth of 256Kbps to match with 802.15.4 Routing algorithm is kept common to complete system i.e. Bellman Ford. The FSO link which is achieved by wired link of bandwidth 1.25Gbps, link propagation delay 1ms is presented. Even same link is replaced by wireless link in simulator with bandwidth of 1.25Gbps. For the given distance and application no variations are obtained in results. H2E2 simulation model is shown in figure 10.

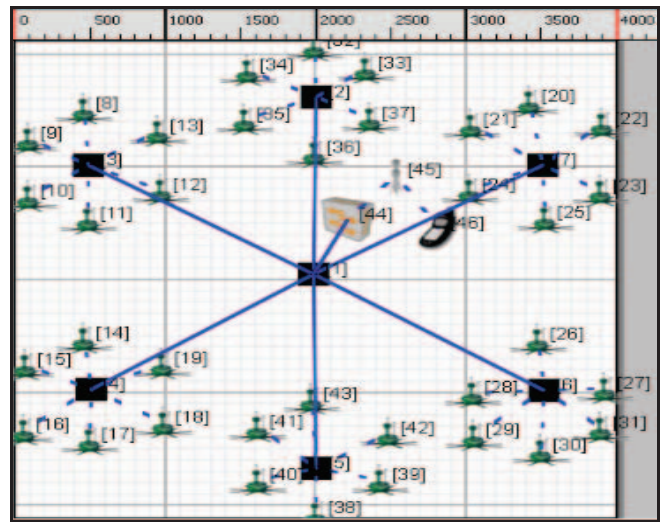


Figure 10. System simulation model to check performance

Transport layer covers packets through and from application layer, Network layer covers queue length and packet drops, MAC layer shows no. of frames sent and received and link utilization. Some of the results are mentioned here.

1) *MAC Layer Results* : At MAC layer no. frames sent and received is obtained. Here Link Utilization is presented as it reflects the energy utilization and lifetime of network. Node 2-6 which are cluster heads are equally utilized even RF sub nodes are equally utilized which reflects uniform distribution of load leading to healthy network.

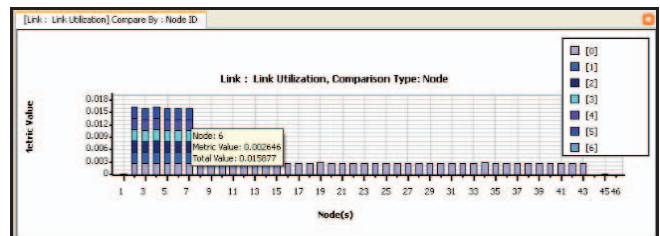


Figure 11. Link utilization for system model

2) *Network Layer*: Network layer defines peak queue length and packet drops observed. Queue length is in well control and uniform and 5 packet drops are observed on switch i.e. node 44 with the scale up network of system model. Dequeing is also observed in results of simulation performed.

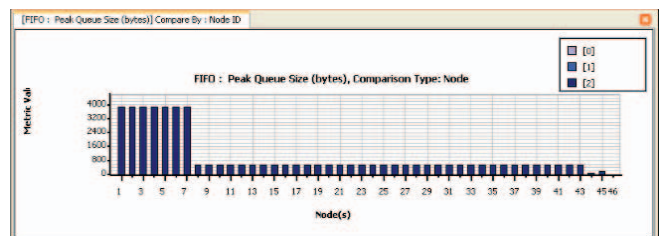


Figure 12. Peak Queue length

V. GREEN SYSTEM: ENERGY MANAGEMENT

Three level energy management is proposed for the system which makes it energy efficient which are Base Station, HHP and Transmission Link. Future scope of this study presents energy budget and calculation of energy requirement and supply for the three levels.

A. Green Base Station

Open space at villages and ample solar radiations available, harvesting solar or wind energy is wise option to chose. In FSO link major energy requirement are at base station through they are less than other link type. Other end of FSO link is passive which just reflect the link back to origin. Solar will support such low power requirement (40W, +/- 48V) for long time. Sleep mode, idle mode can also be managed as link is not live 24 hrs. Use of [4] which uses low power maximum power point tracker (MPPT) circuit specifically designed for WSN nodes i.e. power transferring circuit for optimally conveying solar energy into rechargeable batteries even in non optimal solar radiation.

B. Green HHP

Hybrid Hexagonal Positioning can be considered as green positioning. It helps to save energy consumption of RF link. Concept of traffic spreading can be achieved [16]. Energy Histogram which explains the energy distribution among nodes and it is desired to be uniform for long life and less energy consumption. In proposed structure all cluster heads are utilized at uniform level and are connected to nearest RF node distributed in grid fashion thus follows the concept of uniform energy distribution on all nodes.

C. Green Link

As the link utilization is uniform lifetime of network and sensor nodes on field increases and energy efficiency is achieved. As per the results proposed system achieves better link utilization. [9] Shows energy model for RF/FSO where typical value for RF transmission is 50nJ/bit and 50nJ/bit for receiver. For the given system energy model, 1.642nJ/bit energy is achieved for RF link. To that FSO requires 19pJ/bit for switching. And FSO transmitter recommended requires 1.3dBm (1.35mJ/s).

VI. CONCLUSION

Enabling precision agriculture is complete aim of this study. Technology in hands of people will bring changes and awareness of utilizing it for advanced farming systems. To bring it to real time, study proposed energy efficient and village centric green H2E2 WSN platform. Use of long distance FSO link and short distance RF link, HHP, solar harvesting, introduction to OFC-FSO, results obtained for better link utilization and energy management makes this system green and locally fit. There are challenges of LoS, weather, awareness among people. But weather is not the major challenge in India at least and awareness for ICT is growing at very fast rate. As per one study there is one cell phone among two houses in rural India. Study has created some opportunities for future work i.e. simulator patch for retroreflectometer, hybrid network simulators, software and

application development for system and business model. As this is the platform and available smart systems with the help of data acquisition and processing further many things can be clubbed in near future. Overall authors have tried to develop a deliverable green platform of hybrid network and create win-win situation for PA practices.

REFERENCES

- [1] "Save and Grow," Food and Agricultural Organization of The United Nations, Rome, ISBN 978-92-5-106871-7, 2011
- [2] G J Pottie, and W J Kaiser, "Wireless Integrated Network Sensors," Communication of the ACM, Vol.43, pp.551-8, 2000.
- [3] I F Akyildiz, Wu Su, Y Sankarasubramaniam, and E Cayirci, "A survey on sensor networks," IEEE Communications Magazine, Vol. 40, pp.102-14, 2002
- [4] Cesare Alippi, Cristian Galperti, "An adaptive system for Optimal Solar Energy Harvesting in Wireless Sensor Network Nodes," IEEE Transactions on Circuits and Systems – I : Regular Papers, Vol. 55, No.6, July 2008
- [5] L Zhou, J M Kahn and K S J Pister, "Corner-cube reflectors based on structure assisted assembly for free space optical communication," Journal of Microelectromechanical Systems, Vol. 12, pp. 233-42, 2003
- [6] N.Sridhar, D.Freeman, "A Study of Dye Sensitized Solar Cells under Indoor and Low Level Outdoor Lighting: Comparison to Organic and Inorganic Thin Film Solar Cells and Methods to Address Maximum Power Point Tracking," ISBN3-936338-27-2, pp. 232-236
- [7] P.Mandl, Ch. Chlestil, K. Zettl and E. Leitgeb, "Hybrid systems Optical Wireless, Fiber Optics and WLAN for temporary multimedia applications" 9th International Conference on Telecommunications-ConTEL-2007 ISBN: 978-953-184-111-5, June 13-15, 2007, Zagreb, Croatia
- [8] C M Swenson, C A Steed, I A DeLaRue and R Q Fugate, "Low Power FLC based retromodulator communications systems," Proceedings of SPIE Free Space Laser Communication Technologies IX, Vol.2990, pp.296-310, 1997
- [9] Shashigaran Sivathanan, Dominic O'Brien, "Hybrid Radio and Optical Communications for Energy-efficient Wireless Sensor Networks," IETE Journal of Research, Vol.No. 57 Issue 5, Sep-Oct 2011
- [10] T S Rappaport, "Wireless Communications: Principle and Practice," 2nd edition, New Jersey: Prentice Hall;2002.
- [11] I F Akyildiz, Wu Su, Y Sankarasubramaniam, and E Cayirci, "Wireless Sensor Networks: A Survey," Computer Networks, Vol.38, pp.393-422, 2002
- [12] Aqeel-ur-Rehman, Abu Zafar Abbasi, Noman Islam, Zubair Ahmed Shaikh, "A Review of Wireless Sensors and Networks' Applications in Agriculture," Science Direct Procedia, Computer Standards and Interfaces, 0920-5489, doi:10.1016/j.csi.2011.03, 2011
- [13] Bijayananda Patnaik, P.K. Sahu, "Optimized Ultra-high bit rate hybrid optical communication system design and simulation," Science Direct Procedia, Optik 0030-4026,doi:10.1016/j.ijleo.2011.11.080
- [14] Manijeh Keshtgary, Amene Delijoo, "An Efficient Wireless Sensor Network for Precision Agriculture," Canadian Journal on Multimedia and Wireless Networks, Vol. 3, No.1 , January 2012
- [15] Milind Pande, N.K. Chaudhary and Shantanu Pathak, "Energy Efficient Hybrid Architecture and Positioning of Sensors in WSN for Precision Agriculture," CUBE 2012, International IT Conference, Pune, India, ACM Digital Library, pp 198-203, doi-10.1145/2381716.2381754, ISBN: 978-1-4503-1185-4, 2012
- [16] Curt Schurgers, Mani B. Srivastava, " Energy Efficient Routing in Wireless Sensor Networks," Network and Embedded Systems Lab, Electrical Engineering Department, University of California at Los Angeles, California, USA